Equiparc

Seasonal inspection



At the beginning of each season, check the stability and levelness of the furniture.

Inspect all support and base connections, as well as slat fasteners and ground anchors.

Make any necessary adjustments and tighten all connections.

EXPERT ADVICE

Regular inspections help extend the lifespan of the furniture and ensure user safety.

Maintenance of structures and wood

Durable materials, proper maintenance.




Hot-dip galvanized steel (Unpainted)

- No maintenance required.
- If the structure is damaged and the steel is exposed (scratches, etc.), we recommend applying a zinc-based cold galvanizing spray to the affected areas.

Product reference

Spraygalv Bright - Dynaflux Inc.

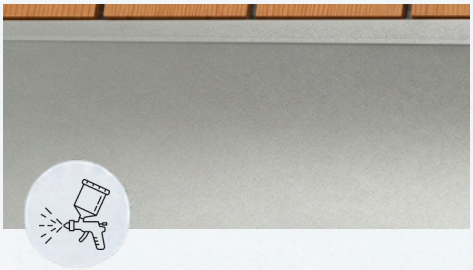

Hot-dip galvanized steel (painted)

- If the hot-dip galvanized steel is painted, we recommend performing any necessary paint touch-ups annually.

Product referenc:

Exterior-grade paints, ensuring that the colours are properly matched. Equiparc is able to supply this type of paint.



Stainless steel

- No maintenance required.
- To clean stainless steel components, we recommend using cleaning products specifically formulated for stainless steel.

Product reference

Cerama Bryte.

Simple tips to preserve the longevity of your outdoor spaces.

Equiparc



Painted zinc-primed steel or painted aluminum

- To preserve the finish, we recommend cleaning these surfaces with mild soap and performing any necessary paint touch-ups annually.

Product reference

Exterior-grade paints, ensuring that the colours are properly matched.Equiparc is able to supply this type of paint.



Recycled plastic

- No maintenance required.
- Highly durable, crack-resistant, and splinter-free.
- Clean with water and regular soap as needed.



Ipe, Jatoba and Kebony wood

- No maintenance is required.
- The wood will **naturally weather to a grey patina** over time without losing its physical properties..
- Its original appearance can be restored by following these steps:

Lightly sand the wood and remove all residual dust before applying oil.
Apply the oil according to the manufacturer's instructions for the selected product.

Product reference

Ipe Oil ou Messmer's U.V. plus for hardwoods



Douglas Fir and white Oak

- Apply one or more coats of exterior wood stain **every 2 to 3 years**, depending on the product used.

Lightly sand the wood and remove all residual dust before applying the stain.
Apply the stain according to the manufacturer's instructions. Some products require multiple coats and a specific drying time.

Product reference

Sikkens Cetol 1 & Cetol 23 Plus

GENERAL INFORMATION REGARDING ALL WOOD TYPES

It is normal for cracks to develop and for wood to turn grey over time due to UV exposure. Air-dried wood naturally adjusts to ambient temperatures and acclimates to its surrounding environment. These natural changes do not affect its structural integrity or physical properties.

FOR ANY QUESTIONS

Regarding furniture maintenance, please don't hesitate to contact us if you have any questions or need assistance.

Info@equiparc.com / www.equiparc.com